

SPECIFICATIONS

WRIGHT VELKE QUAD LEVER




Cutting Width		32"	36"	48"	52"
MOWER	Cutting Height Range	1.5 - 4.25"	1.5 - 4.25"	1.5 - 4.25"	1.5 - 4.25"
	Deck Lift System	Shims, fixed deck	Shims, fixed deck	Shims, fixed deck	Shims, fixed deck
	Deck Construction	7 Gauge	7 Gauge	7 Gauge	7 Gauge
	Blades (1/4" thick, high-lift wings)	(2) 16.5"	(2) 18"	(3) 16.5"	(3) 18"
	Blade Tip Speed (fpm at 3584 rpm)	19,000	19,000	19,000	19,000
	Spindles	Cast Iron Housings	Cast Iron Housings	Cast Iron Housings	Cast Iron Housings
	Blade Clutch/Brake Maintenance-Free; Rated Heavy Duty	Warner™	Warner™	Warner™	Warner™
	Discharge Systems	Side, Rear & Mulch	Side, Rear & Mulch	Side, Rear & Mulch	Side, Rear & Mulch
ENGINE	Makes Available	Kawasaki™	Kawasaki™	Kawasaki™	Kawasaki™
	Horsepower	15	15, 17	15, 17, 19	17, 19
	Cylinders	2	2	2	2
	Starting	Recoil	15, 17 Recoil 17 Recoil & Electric	15, 17 Recoil 17 Recoil & Electric 19 Electric	17 Recoil 17 Recoil & Electric 19 Electric
	Hour Meter	Included	Included	Included	Included
TRACTOR	Operator Controls	Quad Lever™	Quad Lever™	Quad Lever™	Quad Lever™
	Hydro Pumps	10 cc	10 cc	10 cc	10 cc
	Fuel Capacity	6.4 Gal.	6.4 Gal.	6.4 Gal.	6.4 Gal.
	Drive Tires	16 x 4.0 - 8	18 x 6.5 - 8	18 x 8.5 - 8	18 x 8.5 - 10
	Caster Tires	9 x 3.5 - 4	9 x 3.5 - 4	9 x 3.5 - 4	9 x 3.5 - 4
	Speed Forward (mph)	6.5	7.2	7.2	7.2
	Speed Reverse (mph)	3.9	4.3	4.3	4.3
DIMENSIONS	Overall Length	72"	76"	69"	71.5"
	Overall Width - Deflector Up (Down)	33" (44")	37" (48")	49" (60")	53" (64")
	Dry Weight	540	560	640	650

QUAD LEVER™ CONTROLS



VELKE™ SULKY STOWAGE

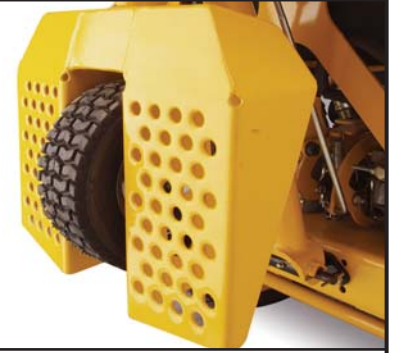

VELKE™ PR01



VELKE™ X2



Warranty 2-year Limited Warranty: Covers parts and labor. For further details, see your local Wright dealer.

To find the name of your nearest dealer, please visit www.wrightmfg.com.

COMING SOON TO A WRIGHT DEALER NEAR YOU!

For more information, call 1.301.360.9810 or find our dealer locator at www.wrightmfg.com.

THE WRIGHT WAY TO MOW.

