

SPECIFICATIONS

WRIGHT VELKE PISTOL GRIP



| Cutting Width | 32" | 36" | 48" | 52" |
|----------------------------------------------------------|--------------------|--------------------|--------------------|--------------------|
| Cutting Height Range | 1.5 - 4.25" | 1.5 - 4.25" | 1.5 - 4.25" | 1.5 - 4.25" |
| Deck Lift System | Shims, fixed deck | Shims, fixed deck | Shims, fixed deck | Shims, fixed deck |
| Deck Construction | 7 Gauge | 7 Gauge | 7 Gauge | 7 Gauge |
| Blades (1/4" thick, high-lift wings) | (2) 16.5" | (2) 18" | (3) 16.5" | (3) 18" |
| Blade Tip Speed (fpm at 3584 rpm) | 19,000 | 19,000 | 19,000 | 19,000 |
| Spindles | Cast Iron Housings | Cast Iron Housings | Cast Iron Housings | Cast Iron Housings |
| Blade Clutch/Brake Maintenance-Free; Rated Heavy Duty | Warner™ | Warner™ | Warner™ | Warner™ |
| Discharge Systems | Side, Rear & Mulch | Side, Rear & Mulch | Side, Rear & Mulch | Side, Rear & Mulch |

MOWER

ENGINE

TRACTOR


DIMENSIONS

| | | | | |
|-------------------------------------|---------------|---------------------------------------|------------------------------------------------------|--------------------------------------------------|
| Makes Available | Kawasaki™ | Kawasaki™ | Kawasaki™ | Kawasaki™ |
| Horsepower | 15 | 15, 17 | 15, 17, 19 | 17, 19 |
| Cylinders | 2 | 2 | 2 | 2 |
| Starting | Recoil | 15, 17 Recoil 17 Recoil & Electric | 15, 17 Recoil 17 Recoil & Electric 19 Electric | 17 Recoil 17 Recoil & Electric 19 Electric |
| Hour Meter | Included | Included | Included | Included |
| Operator Controls | Pistol Grip | Pistol Grip | Pistol Grip | Pistol Grip |
| Hydro Pumps | 10 cc | 10 cc | 10 cc | 10 cc |
| Fuel Capacity | 6.4 Gal. | 6.4 Gal. | 6.4 Gal. | 6.4 Gal. |
| Drive Tires | 16 x 4.0 - 8 | 18 x 6.5 - 8 | 18 x 8.5 - 8 | 18 x 8.5 - 10 |
| Caster Tires | 9 x 3.5 - 4 | 9 x 3.5 - 4 | 9 x 3.5 - 4 | 9 x 3.5 - 4 |
| Speed Forward (mph) | 6.5 | 7.2 | 7.2 | 7.2 |
| Speed Reverse (mph) | 3.9 | 4.3 | 4.3 | 4.3 |
| Overall Length | 72" | 74" | 69" | 71.5" |
| Overall Width - Deflector Up (Down) | 33.5" (43.5") | 36.5" (46.5") | 49" (59") | 53" (63") |
| Dry Weight | 520 | 545 | 555 | 575 |

VELKE™ PISTOL GRIP CONTROLS



VELKE™ SULKY STOWAGE

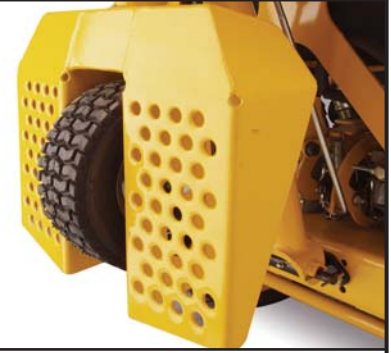

VELKE™ PR01



VELKE™ X2



Warranty 2-year Limited Warranty: Covers parts and labor. For further details, see your local Wright dealer.

To find the name of your nearest dealer, please visit www.wrightmfg.com.

COMING SOON TO A WRIGHT DEALER NEAR YOU!

For more information, call 1.301.360.9810 or find our dealer locator at www.wrightmfg.com.

THE WRIGHT WAY TO MOW.

wright[™]
commercial products